

## Tails - Long Thread 120°

Designed and made in New Zealand, TRUDESIGN Tail Long Thread 120° fittings are the superior composite connection for fitting hoses to threaded fittings.



TruDesign Tails are moulded from a glass reinforced nylon composite. High strength, high-modulus glass fibres impregnated into the nylon provides dramatic strength, stiffness, toughness, and dimensional stability. TruDesign Tails eliminate the corrosion and electrical bonding problems associated with metallic fittings. The Tails are designed for twin hose clamps, and to not crush under high load conditions.

### Models:

Part #	BSP Models	Part #	NPS Models
90531	Tail 25mm 1" BSP Long Thread 120°	90924	Hose Barb 1" x 1" NPS Long Thread 120°
90572	Tail 25mm 1" BSP Long Thread 120° PKG	90925	Hose Barb 1" x 1" NPS Long Thread 120° PKG
90922	Tail 32mm 1¼" BSP Long Thread 120°	90926	Hose Barb 1¼" x 1¼" NPS Long Thread 120°
90923	Tail 32mm 1¼" BSP Long Thread 120° PKG	90927	Hose Barb 1¼" x 1¼" NPS Long Thread 120° PKG
90938	Tail 38mm 1¼" BSP Long Thread 120°	90928	Hose Barb 1½" x 1½" NPS Long Thread 120°
90939	Tail 38mm 1¼" BSP Long Thread 120° PKG	90929	Hose Barb 1½" x 1½" NPS Long Thread 120° PKG
90532	Tail 38mm 1½" BSP Long Thread 120°	90930	Hose Barb 2" x 2" NPS Long Thread 120°
90573	Tail 38mm 1½" BSP Long Thread 120° PKG	90931	Hose Barb 2" x 2" NPS Long Thread 120° PKG
90533	Tail 50mm 2" BSP Long Thread 120°		
90574	Tail 50mm 2" BSP Long Thread 120° PKG		

PKG product is supplied in branded bags



## Key Features

Feature	Benefit
Manufactured from a glass reinforced nylon composite	High strength and light weight.
Immune to corrosion and electrolysis	Long life with no concerns over decreased performance due to corrosion.
Chemical resistant	Impervious to diesel, petrol and antifouling paints.
UV resistant	These fittings will not break down with ultraviolet light or discolour from the sun.
High quality surface finish	Will not discolour with green film as similar bronze fittings do.
Fits Tru-Design Ball Valves, BSP and NPS threads.	Universal compatibility to other TruDesign fittings, and other marine components.
Large operating temperature range	Suitable for all marine environments, from -40°C to +110°C.

## Installation

For thread sealing see TruDesign Technical information sheet on our web site [www.trudesignplastics.com](http://www.trudesignplastics.com) - for suitable adhesive sealants and or thread tapes.

The connecting thread type are either BSP or NPS and clearly marked on the side of the fitting along with size. The advantage of parallel threads rather than tapered is that there can be maximum engagement between the mating threads providing a stronger connection. Do not over tighten, simply allow the adhesive sealant to provide the seal and orientation of the fitting.

Apply twin hose clamps for a secure hose connection and check tightness regularly.


## Technical Information:

Tail Size	Thread Size	Minimum I.D	Thread Length	Weight
25 mm	1"	Ø 19 mm	30 mm	45 grams / 1.59 oz
32 mm	1¼"	Ø 24 mm	30 mm	65 grams / 2.29 oz
38 mm	1¼"	Ø 30 mm	30 mm	75 grams / 2.65 oz
38 mm	1½"	Ø 30 mm	30 mm	80 grams / 2.82 oz
50 mm	2"	Ø 42 mm	30 mm	130 grams / 4.59 oz



Dimensions:

Dimensions are in millimetres & [inches]  
All dimensions nominal

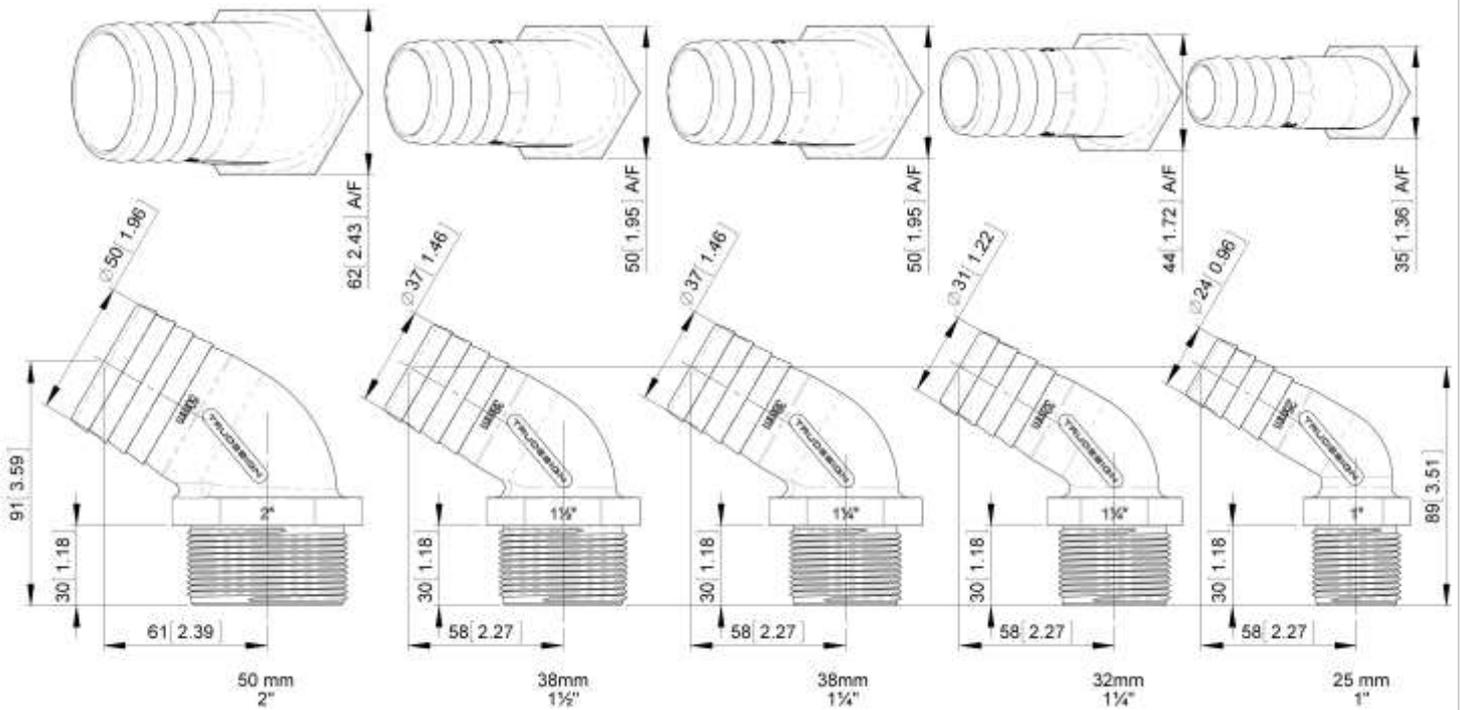

The information contained in this information sheet is for general information purposes only. The information is provided by TruDesign™ and while we endeavour to keep the information up to date and correct, we make no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability. Any reliance you place on such information is therefore strictly at your own risk.